4HP equiv.




ELECTRIC OUTBOARD
RemigoOne GO 1500W

A 1500 W continuous Boost (4 HP equivalent) electric outboard in the shape of a rudder — powerful, silent, and sleek.

- Built for performance: Handles heavy loads and long distances with ease
- Ultra-light & waterproof: Just 13 kg, IP67-rated, marine-grade aluminum
- No fuel. No noise. No maintenance
- Perfect for tenders, dinghies, and small sailboats

With an adjustable transom bracket that adjusts to both short and long shaft setups. No need to choose between models — RemigoOne GO adapts to your boat.

€ 2.200,00

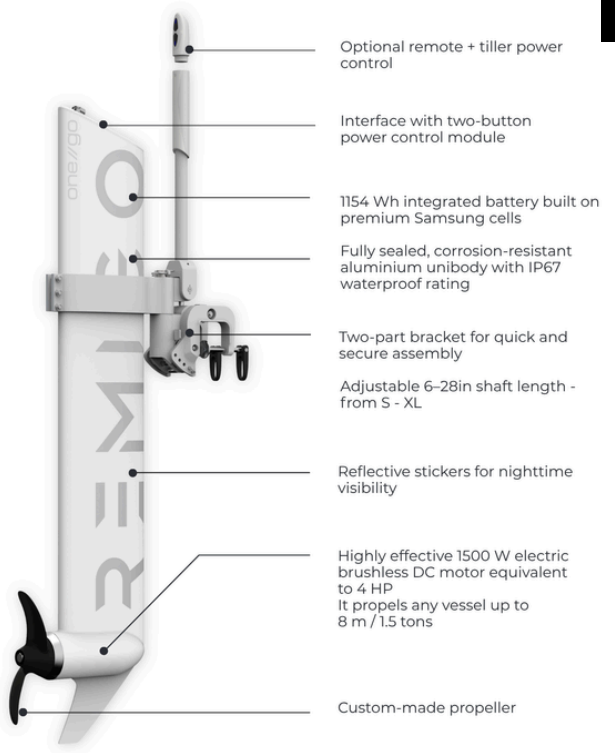

PERFORMANCE SHEET

	Speed in knots	Range in NM
eco	2.0	32 (approx. 59 km)
cruise	3.0	15 (approx. 28 km)
full speed	5.0	5.3 (approx. 9.8 km)
boost	6.9	3.7 (approx. 6.9 km)

Price is excluding VAT and shipping cost


minicat
ULTRA LIGHT CATAMARAN
MiniCat Worldwide - authorised OEM distributor for Remigo

ACCESSORIES & SPARE PARTS

RemigoOne GO 1500W



Remote control



Bag / Backpack




Aluminum Propeller



Transom Bracket



Storage Wall Mount



Solar Charging Setup



Standard AC Charger



Fast AC Charger



DC Charger

Prices are excluding VAT and shipping cost

When paired with a 1154-Wh battery and a 3.40 m inflatable boat, the RemigoOne GO delivers impressive range across different power settings:

- **Full throttle:** At maximum output, the RemigoOne GO powers the boat at approximately 6..9 knots for about one hour — covering a total distance of 6.9 km. Perfect for short, fast transfers or quick outings.

- **Cruising mode:** Dialing back to moderate power extends your time on the water to around 4.5 hours, cruising comfortably at 3.0 knots. That gives you a range of roughly 28 km — ideal for relaxed exploration or day trips.

- **Eco mode:** For long, leisurely journeys, the Remigo One GO can run at just 75 watts of power, maintaining a steady pace of 2.0 knots for up to 15 hours. That's a remarkable 59 km of range — all from a single battery charge.

PACKAGE INCLUDES:

- RemigoOne GO Electric Outboard
- Tiller Bracket
- Transom Bracket
- Standard AC Charger
- 2x RemigoOne Neo Key
- Toolset
- User manual

minicat ULTRA LIGHT CATAMARAN
MiniCat Worldwide - authorised OEM distributor for Remigo

ACCESSORIES & SPARE PARTS

RemigoOne GO 1500W

Charging Cable Extension 6 m	€ 55,00
Charging Cable Extension 10 m	€ 70,00
Solar Charger	€ 105,00
Solar Panels 200W	€ 300,00
Propeller RemigoOne Neo	€ 80,00
Magnetic Killswitch	€ 18,00
Anode set - Zn	€ 44,00
Anode set - Mg	€ 44,00
Tiller Bracket	€ 220,00
Shear pins - 5 pcs	€ 2,00
Safety Bracket Pin	€ 10,00
Mounting Screw Set	€ 15,00
Mounting Screw Handle	€ 6,00
Replacement Battery (1085 Wh)	€ 800,00

Prices are excluding VAT and shipping cost

Technical specifications

input power - full power / boost mode	1000 W / 1500 W
motor type	BLDC
static thrust - full power / boost mode	68 / 79 lbf
comparable HP - full power / boost mode	3 HP / 4 HP
battery	**integrated 1154 Wh Li-Ion**
nominal voltage	36 V
maximum voltage	42 V
charging time 5A standard charger (100 - 240 V)	**6 h 30**
charging time 10A fast charger (100 - 240 V)	**3 h 15**
charging time 2A DC charger (12 - 30 V)	**11 - 12 h**
outboard weight / with bracket	28.5 / 34 lbs
shaft length	15 - 25 inch (S-XL eq.)
protection class (IP rating)	IP67
max propeller speed	2000 rpm (power controlled)
control type	two-button control on interface
remote control compatible	yes
lockable steering	yes
tilting	manual
trim	manual, 0° / 7° / 14° / 21°
reverse	yes
outboard dimensions h x w x d	**46.5 x 11.6 x 3.5 in**
range extender compatible	**yes**

minicat
ULTRA LIGHT CATAMARAN
MiniCat Worldwide - authorised OEM distributor for Remigo